




Rustic Tones – SPA30

PRODUCT SPECIFICATIONS

| | |
|--|--|
| Style Name: | Rustic Tones SPA30 |
| Plank/Tile Dimensions: | 7 ½" Wide x 47 ¼" Long x 8 mm Thick |
| Strips Per Plank: | Single |
| Pieces per Carton: | 7 |
| Pattern Repeat | 10 |
| Sq. Ft. per Carton: | 17.18 |
| Cartons per Pallet: | 60 |
| Weight per Carton: | 26.35 lbs |
| Profile: | UniClic® Technology |
| Surface Appearance: | Random Embossed |
| Finish: | Aluminum Oxide |
| Finish Rating: | AC4 |
| Core: | HDF (High Density Fiberboard) |
| Edges/Ends: | Square Edge/Square End |
| Attached Underlayment: | No |
| Warranty: | Limited Lifetime Residential 5 Year Light/Medium Commercial |
| Installation Approved: | Floating Only - On, Above or Below Grade 8 mm |
| ASTM E662-09 Smoke Density (Flaming) | Passes - 450 or Less |
| ASTM E648-10 Radiant Panel | Meets or exceeds Class 1 |
| ASTM C1028-96 Static Coefficient of Friction | 0.53 Dry |
| Large Ball Impact Resistance | Passes Class 4 Heavy Commercial |
| Cleanability-Stain Resistance | Passes Class 4 Heavy Commercial Nalfa 3.4 |
| Static Load | Nalfa 3.1 Passes Class 4 Heavy Commercial |
| Thickness Swell | Nalfa 3.2 Passes Class 4 Heavy Commercial |
| Xenon Light Resistance | Nalfa 3.3 Passes 5.0 Class 4 |
| Radiant Flux | Passes ASTM E648-08 |
| Surface Bond | Nalfa 3.10 Passes Class 4 Heavy Commercial |

| Colors | | Quarter Round MQND | Incizo 5 in 1 MINCS | Incizo Base Stair Nose | Stair Nose MSNP |
|---------------|----|-----------------------|------------------------|---------------------------|--------------------|
| Kaffee Brown | 01 | MQND-02982 | MINCS-01570 | 5BASE-02 | MSNP-01570 |
| Grey Slate | 02 | MQND-03594 | MINCS-03594 | 5BASE-02 | MSNP-03594 |
| Soft Graphite | 03 | MQND-03595 | MINCS-03595 | 5BASE-02 | MSNP-03595 |
| Fresh Cream | 04 | MQND-02970 | MINCS-02970 | 5BASE-02 | MSNP-02970 |

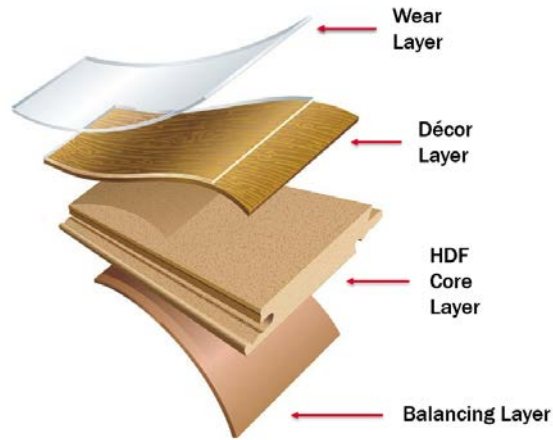

Last Update 3/17/17 TC

We reserve the right without prior notification, to modify specifications, or substitute components as technological advancements or process improvements become available which improve the products performance. Please contact your Spartan Surfaces rep with any questions.

All wood and laminate flooring should be protected from intense natural and/or artificial UV light exposure to minimize color change.

Check www.revere-flooring.com for a copy of our most recent installation instructions before beginning installation.

**Complies with California ATCM 93120 (CARB) Emission Requirements
U.S. Lacey Act Compliant
FloorScore Certified*
*Contributes to LEED points**