




Hadley Point – SPA72  
Hadley Way – SPT19/SPT72

**PRODUCT SPECIFICATIONS**

|  |  |
|--|--|
| Style Name:                                  | Hadley Point SPA72 and Hadley Way SPT19/SPT72                  |
| Plank/Tile Dimensions:                       | 5.236 x 47.24 x 12 mm  |
| Strips Per Plank:                            | Single PLank   |
| Pieces per Carton:                           | 8  |
| Pattern Repeat                               | 15   |
| Sq. Ft. per Carton:                          | 13.75  |
| Cartons per Pallet:                          | 56   |
| Weight per Carton:                           | 31.70 lbs  |
| Profile:                                     | UniClick® Technology   |
| Surface Appearance:                          | Embossed in Register   |
| Finish:                                      | Aluminum Oxide with Scratchguard                               |
| Finish Rating:                               | AC4  |
| Core:  | HDF (High Density Fiberboard)                                  |
| Edges/Ends:                                  | Micro Bevel / Micro Bevel                                      |
| Attached Underlayment:                       | No   |
| Warranty:                                    | Limited Lifetime Residential<br>5 year Medium Light Commercial |
| Installation Approved:                       | Floating Only - On, Above or Below Grade                       |
| ASTM E662-09 Smoke Density (Flaming)         | Passes - 450 or Less   |
| ASTM E648-10 Radiant Panel                   | Meets or exceeds Class 1                                       |
| ASTM C1028-96 Static Coefficient of Friction | 0.58 Dry   |
| Impact Resistance                            | Passes Class 4 Heavy Commercial                                |
| Cleanability-Stain Resistance                | Nalfa 3.4 Passes Class 4 Heavy Commercial                      |
| Xenon Light Resistance                       | Nalfa 3.3 Passes 5.0 Class 4                                   |
| Thickness Swell                              | Nalfa 3.2 Passes Class 4 Heavy Commercial                      |
| Radiant Flux                                 | Passes ASTM E648-08  |
| Static Coefficient of Friction               | Nalfa 3.1 Passes Class 4 Heavy Commercial                      |
| Surface Bond                                 | Nalfa 3.10 Passes Class 4 Heavy Commercial                     |

| Color Name            | Quarter Round | Instaform Profile | Incizo Stair Base | Stair Nose |
|-----------------------|---------------|-------------------|-------------------|------------|
| Antiwue Leather Maple | 01            | MQND-01951        | MINC5-01158       | MSNP-01158 |
| Ginger Sawn Oak       | 02            | MQND-01685        | MINC5-01182       | MSNP-01182 |
| Latte Sawn Oak        | 03            | MQND-02628        | MINC5-01577       | MSNP-01577 |
| Sunbeam Acacia        | 04            | MQND-02895        | MINC5-02895       | MSNP-02895 |
| Buttercream Hickory   | 05            | MQND-01682        | MINC5-01682       | MSNP-01682 |
| Suede Hickory         | 06            | MQND-01970        | MINC5-02873       | MSNP-02873 |
| Sunburst Walnut       | 07            | MQND-01945        | MINC5-01423       | MSNP-01423 |
| Vintage Pine Plank    | 08            | MQND-02321        | MINC5-02449       | MSNP-02449 |
| Haystack Oak          | 09            | MQND-01948        | MINC5-01015       | MSNP-01015 |
| Crips Autumn Oak      | 10            | MQND-01949        | MINC5-02583       | MSNP-02583 |

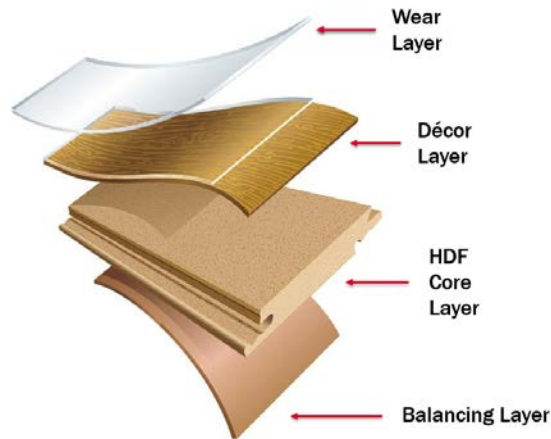

Last Update 3/17/17 TC

**We reserve the right without prior notification, to modify specifications, or substitute components as technological advancements or process improvements become available which improve the products performance. Please contact your Spartan Surfaces rep with any questions.**

**All wood and laminate flooring should be protected from intense natural and/or artificial UV light exposure to minimize color change.**

**Check [www.revere-flooring.com](http://www.revere-flooring.com) for a copy of our most recent installation instructions before beginning installation.**

**Complies with California ATCM 93120 (CARB) Emission Requirements**

**U.S. Lacey Act Compliant**

**FloorScore Certified\***

**\*Contributes to LEED points**