




Classic Tones – SPA19

PRODUCT SPECIFICATIONS

Style Name:	Classic Tones SPA19
Plank/Tile Dimensions:	7.5" x 47.25" x 8mm
Strips Per Plank:	Colors 1 & 2 Multi Wide, others are single appearance
Pieces per Carton:	7
Pattern Repeat	10
Sq. Ft. per Carton:	17.18
Cartons per Pallet:	60
Weight per Carton:	24.83
Profile:	UniClic® Technology
Surface Appearance:	*Random or Embossed In Register
Finish:	Aluminum Oxide
Finish Rating:	AC4
Core:	HDF (High Density Fiberboard)
Edges/Ends:	Micro Bevel Edges / Micro Bevel Ends
Attached Underlayment:	No
Warranty:	Limited Lifetime Residential Finish Warranty 5 year Light to Medium Commercial Finish Warranty
Installation Approved:	Floating Only - On, Above or Below Grade
ASTM E662-09 Smoke Density (Flaming)	Passes - 450 or Less
ASTM E648-10 Radiant Panel	Meets or exceeds Class 1
ASTM C1028-96 Static Coefficient of Friction	0.53 Dry
Impact Resistance	Passes Class 4 Heavy Commercial
Cleanability-Stain Resistance	Passes Class 4 Heavy Commercial Nalfa 3.4
Xenon Light Resistance	Nalfa 3.3 Passes 5.0 Class 4
Thickness Swell	Nalfa 3.2 Passes Class 4 Heavy Commercial
Radiant Flux	Passes ASTM E648-08
Static Coefficient of Friction	Nalfa 3.1 Passes Class 4 Heavy Commercial
Surface Bond	Nalfa 3.10 Passes Class 4 Heavy Commercial

Colors		Quarter Round MQND	Incizo 5 in 1 MINC5	Incizo Base Stair Nose	New Stair Nose MSNP
Barnhouse Oak	01*	MQND-02974	MINC5-02974	5BASE-BASE02	MSNP-02974
Canyon Echo Oak	02*	MQND-02975	MINC5-02975	5BASE-BASE02	MSNP-02975
Honeytone Oak	03	MQND-02945	MINC5-02945	5BASE-BASE02	MSNP-02945
Midday Mocha Oak	04	MQND-01683	MINC5-01494	5BASE-BASE02	MSNP-01494
Cheyenne Rock Oak	05	MQND-02973	MINC5-02973	5BASE-BASE02	MSNP-02973
Chocolate Glazed Maple	06	MQND-02899	MINC5-01056	5BASE-BASE02	MSNP-01056

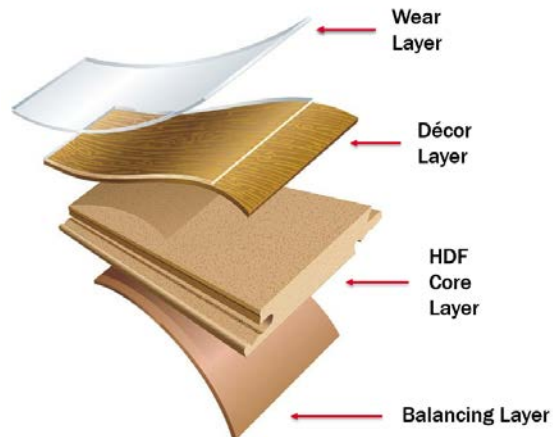

Last Update 3/17/17 TC

We reserve the right without prior notification, to modify specifications, or substitute components as technological advancements or process improvements become available which improve the products performance. Please contact your Spartan Surfaces rep with any questions.

All wood and laminate flooring should be protected from intense natural and/or artificial UV light exposure to minimize color change.

Check www.revere-flooring.com for a copy of our most recent installation instructions before beginning installation.

Complies with California ATCM 93120 (CARB) Emission Requirements
U.S. Lacey Act Compliant
FloorScore Certified*
***Contributes to LEED points**