


REBOUND by REVERE

Revere's Rebound Sport Floor is designed to be the perfect fit where shock absorption, slip resistance, acoustics and other requirements are needed for sporting activities.

FEATURES AND BENEFITS

- Closed cell foam backing specifically designed for athletic floors.
- Superior vertical stability eliminating "area" indentation
- Absorbs shock and impact
- Budget friendly option for a traditional suspended maple hardwood floor
- Seamless, hygienic & easy to maintain
- Optimum traction and slip resistance preventing fatigue and injury
- Polyurethane finish requiring no additional polish or sealers
- High elasticity contributes to NCAA and for ball bounce.
- Comfort under foot
- Acoustically sound for a quiet environment

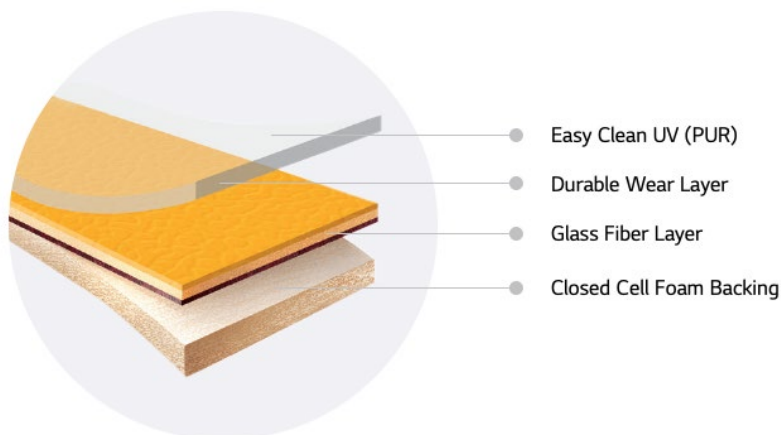

Autumn Maple



Canadian Maple



Golden Maple



Natural Maple

SPECIFICATIONS	DETAILS	NOTES
THICKNESS	6.5MM / .256 INCHES	
WEAR LAYER	40 MIL / 1.0MM / 0.058 INCHES	
GLASS FIBER	YES	
FINISH/COATING	WAXABLE	
NOMINAL DIMENSIONS (INCHES)	WIDTH: 70 INCHES, LENGTH: 49.2 FEET	
ACTUAL DIMENSIONS (INCHES + MM)	W: 70.9" / 1.8M / 1800MM, L: 49.2' / 15M , 16.4YDS	
CLASS / ASTM F1303	TYPE 1, GRADE 1	
BACKING CLASS	4-PLY FUSED BACKING SYSTEM, CLASS B	
GLOSS LEVEL	10-16	
COMMERCIAL TRAFFIC	SPORTS COMMERCIAL	
ADDED ANTIMICROBIAL	NO	
RECYCLED CONTENTS	100% VIRGIN VINYL	
BACKSTAMP INFO	NONE	
CE CERTIFICATION	YES	
PALLET DIMENSIONS (L x W x H) H: 2000MM	1) 1220*1570MM 2) 820*1570MM 3)1080*1000MM	
CARTONS / PALLETS / CONTAINER	1) 1220*1570MM : 12 ROLLS/PALLET 2) 820*1570MM : 8 ROLLS/PALLET 3)1080*1000MM : 6 ROLLS/PALLET	
SQ YD PER ROLL	8 PALLETS (12 ROLLS/PALLET X 3, 8ROLLS/PALLET X 3, 6ROLLS/PALLET X 2)	
SQ YD PER PALLET	32.35SQYD/ROLL	20 FOOT CONTAINER
WEIGHT PER ROLL	1) 1220*1570MM : 387.6 SQYD 2) 820*1570MM : 258.4 SQYD 3)1080*1000MM :193.8 SQYD	
WEIGHT PER PALLET (PALLET WEIGHT)	253.6 LBS/ROLL	
WEIGHT PER PALLET (PALLET WEIGHT)	1) 1220*1570MM : 3043.2 LBS/PALLET 2) 820*1570MM : 2028.8 LBS/PALLET 3)1080*1000MM : 1521.6 LBS/PALLET	
ROLL WRAPPING PAPER TYPE	CRAFT PAPER WITH PE FOAM WRAPPING (PP COATING)	EN REQUIREMENT
EN 428 TOTAL THICKNESS	6.5	MM
NF EN 13036-4 FRICTION	AVERAGE 87	80-110
EN 14808 SHOCK ABSORPTION	≥ 25	MIN 25%
EN 14809 VERTICAL DEFORMATION	1	≤ 5.00MM
NF EN 12235 VERTICAL BALL REBOUND	AVERAGE 96	≥ 90%
NF EN 1569 BEHAVIOR UNDER A ROLLING LOAD	NO DAMAGE	NO DAMAGE
EN ISO 5470-1 RESISTANCE TO WEAR	0.21	SYNTHETIC SURFACE: ≤ 1.00G
NF EN 1516 RESISTANCE TO STATIC LOAD	AVERAGE 0.33	≤ 0.5MM
NF EN 1517 RESISTANCE TO IMPACT	NO DAMAGE	NO DAMAGE
TS 15122 RESISTANCE TO REPEATED IMPACT	NO DAMAGE	NO DAMAGE
EN 13501-1 BEHAVIOR TO FIRE	CLASS 2	
ASTM E-303 SURFACE FRICTION	24	20 ≥
ASTM F-2569 FORCE REDUCTION FOR ATHLETIC USE	PERFORMANCE LEVEL 2	LEVEL 2
ASTM F-2157 VERTICAL DEFORMATION FOR RUNNING TRACKS	.0995MM	≤ 3.5MM
ASTM F-2117 VERTICAL REBOUND	97.77%	≥ 90%
PRODUCT WARRANTY	10 YEARS FOR COMMERCIAL	
INSTALLATION METHOD	FULL SPREAD	
APPROVED INSTALLATION METHODS	GLUE DOWN	
ADHESIVE REQUIRED	XL BRANDS HYDRASTIX95 OR XL 5500	
SPECIFICATION WELD ROD	MATCHING WELD ROD AVAILABLE PER COLOR	